

# DRAWING GLOVE

by Blahmage

## You need:

- stretchy fabric 25 x 25 cm
- matching yarn
- ballpoint (Jersey-) needles

## Which fabric can I use?

You can use any stretchy knit-based fabric that doesn't run. This could be jersey, lycra or spandex, for example. french terry is a good choice for beginners, as it is not quite as stretchy as jersey, but is somewhat easier to handle. Jersey should be part synthetic fiber (e.g. 3% elastane) so that the glove does not bulge over a longer period of time.

However, if you have a stretchy fabric remnants at home, simply use that first.

## Pattern pieces

1. glove (1 x on fold)

There is no seam allowance included in the **pattern**. Because you cut the glove slightly differently to a normal garment, please read through the instructions to see how we deal with the seam allowance.


## Print out the pattern

You will need to print the pattern in „actual size“ using your Acrobat Reader. Make sure this box is ticked.

You will find a control square on the pattern, which must be 5 x 5 cm in the printout.

## Adjusting the pattern

If you have particularly long or short fingers, you can adjust the cut using the marked guide lines.

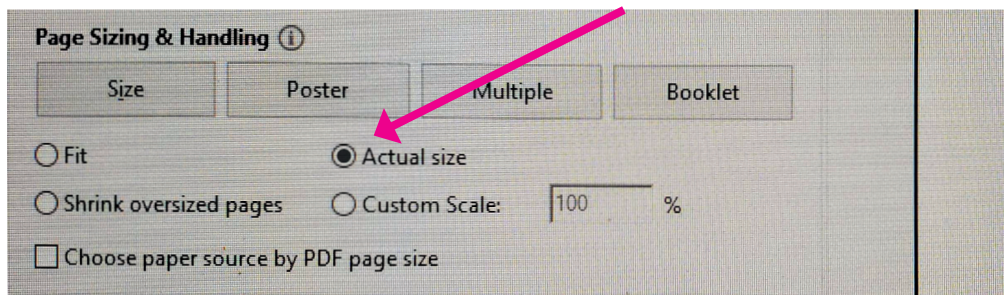

# INSTRUCTIONS


## Drawing Glove

**1. Cut out the glove.** Because the glove has very narrow seam allowances in some places, I proceed a little differently than usual.

Make a fabric fold and place the pattern on the fold.

Then draw a line around the pattern. I usually use a self-erasing or water-soluble pen for this. White coloured pencils work well on a dark fabric.

Now cut the bottom hem, the side seam and the ring finger up with a 1 cm seam allowance. Ignore the second finger and only cut roughly around both fingers.


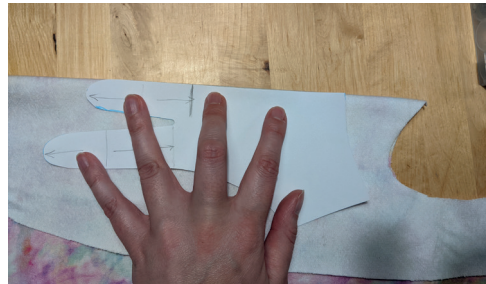


**2. Sew the finger seams.** Sew around the fingers, up to the marking shown in the pattern. It is best to start at the marking and end at the fabric fold - this makes the beginning easier to sew.

Set the stitch between the fingers to a shorter stitch length. There is a lot of pressure on this point and you will have to cut in the fabric close to the seam.

Then cut around the fingers at a distance of approx. 2 mm and let the seam allowance run out about 1 cm before the marking to the 1 cm.

Cut between the fingers until just before the seam.

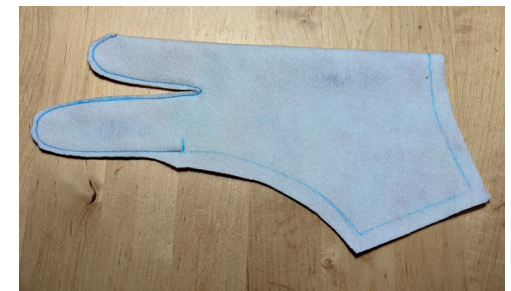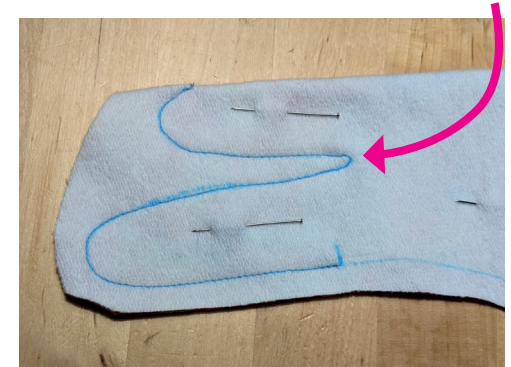



# INSTRUCTIONS

## Drawing Glove

- 3. Sew the hem at the fingers.** First press the hem 1 cm over.



Now sew the edge with a stitch that remains elastic - either with a forward-backward stitch or, as shown here, with a small zigzag stitch. The seam will then remain stretchy later. Sew from the outside to the finger - this is easier than starting at the finger.



- 4. Sew the hem.** Press the hem 1 cm over and pin it in place. If you pin the needles at right angles to the seam as shown in the picture, you can simply sew over them later and don't have to pull them out.

Use a zigzag stitch here too so that the seam remains elasticated.



- 5. Sew the side seam.** Pin the side seam right sides together (pretty side to pretty side) and sew them together.

Press the side seam open and sew the seam allowance at the top and bottom so that the seam remains open.



**Your glove is finished!**

